

# VTT10-HH

## TEMPERATURE TRANSMITTER

head mounting model



- ✓ Two Wire Loop Powered Transmitter with HART® 7 / 4 – 20 mA Communication Protocol
- ✓ Sensor Inputs RTD, TC, Ohm and mV
- ✓ 2, 3 or 4 Wires Measurement
- ✓ Ambient Temperature Compensation
- ✓ Callendar Van Dusen
- ✓ Galvanic Isolation of 1.5 kVAC
- ✓ Head Mounting (DIN 43729 B)
- ✓ Power Supply 12 to 45 Vdc (no polarity)
- ✓ Analog Output 4-20 mA NAMUR NE 43
- ✓ Operation Temperature - 40 to 85 °C
- ✓ Configuration, Calibration, Monitoring and Diagnostics via HART Configurator and Supported by Android, EDDL and FDT/DTM Tools

## DESCRIPTION

**VTT10-HH** is a member of Vivace Process Instruments Temperature Transmitters family, designed to DIN B head mounting assembly. It accommodates several sensor types, such as thermocouples and RTDs, plus resistance and voltage signals.

The transmitter is powered by a 12 to 45 Vdc voltage and modulates the communication on a 4 to 20 mA current, according to NAMUR NE43, using HART® 7 communication protocol, already established as the most used in the industrial automation world for configuration, calibration, monitoring and diagnostics.

Using a HART configurator or Android platform, EDDL and FDT/DTM tools it is possible to configure the sensor type, measuring scales, work units, perform a calibration in addition to monitoring the measurement variables and checking the status of the device.

Prioritizing its high performance and robustness, VTT10-HH was designed with latest electronic and material technologies, ensuring long-term reliability for systems of any scale.


## SENSOR CONNECTION

### RTD or $\Omega$


2-wires

3-wires

4-wires

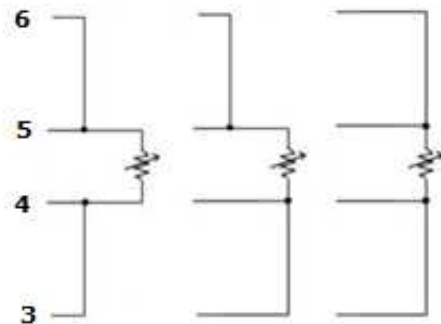

### TC / mV



## SENSOR TYPES

RTD – Temperature sensor based on resistance with 2, 3 or 4 wires connection

| SENSOR OPTION               | REFERENCE                 | INPUT RANGE (°C) | MINIMUM SPAN (°C) | ACCURACY (°C) |
|-----------------------------|---------------------------|------------------|-------------------|---------------|
| Pt100 ( $\alpha=0.00385$ )  | IEC751                    | -200 to 850      | 10                | 0.10          |
| Pt200 ( $\alpha=0.00385$ )  | IEC751                    | -200 to 850      | 10                | 0.50          |
| Pt500 ( $\alpha=0.00385$ )  | IEC751                    | -200 to 850      | 10                | 0.20          |
| Pt1000 ( $\alpha=0.00385$ ) | IEC751                    | -200 to 300      | 10                | 0.20          |
| Pt100 ( $\alpha=0.003916$ ) | JIS1604                   | -200 to 645      | 10                | 0.15          |
| Pt200 ( $\alpha=0.003916$ ) | JIS1604                   | -200 to 645      | 10                | 0.70          |
| Ni120                       | Edison Curve #7           | -70 to 300       | 10                | 0.08          |
| Cu10                        | Edison Copper Winding #15 | -50 to 250       | 10                | 1.00          |
| Pt50 ( $\alpha=0.00391$ )   | GOST 6651-94              | -200 to 850      | 10                | 0.20          |
| Pt100 ( $\alpha=0.00391$ )  | GOST 6651-94              | -200 to 850      | 10                | 0.12          |
| Cu50 ( $\alpha=0.00426$ )   | GOST 6651-94              | -50 to 200       | 10                | 0.34          |
| Cu50 ( $\alpha=0.00428$ )   | GOST 6651-94              | -185 to 200      | 10                | 0.34          |
| Cu100 ( $\alpha=0.00426$ )  | GOST 6651-94              | -50 to 200       | 10                | 0.17          |
| Cu100 ( $\alpha=0.00428$ )  | GOST 6651-94              | -185 to 200      | 10                | 0.17          |

TC - Temperature sensor based on mV with 2 wires connection

| SENSOR OPTION   | REFERENCE    | INPUT RANGES (°C) | MINIMUM SPAN(°C) | ACCURACY (°C) |
|-----------------|--------------|-------------------|------------------|---------------|
| Thermocouple B  | IEC584       | 100 to 1820       | 25               | 0.75          |
| Thermocouple E  | IEC584       | -50 to 1000       | 25               | 0.20          |
| Thermocouple J  | IEC584       | -180 to 760       | 25               | 0.25          |
| Thermocouple K  | IEC584       | -180 to 1372      | 25               | 0.25          |
| Thermocouple N  | IEC584       | -200 to 1300      | 25               | 0.40          |
| Thermocouple R  | IEC584       | 0 to 1768         | 25               | 0.60          |
| Thermocouple S  | IEC584       | 0 to 1768         | 25               | 0.50          |
| Thermocouple T  | IEC584       | -200 to 450       | 25               | 1.00          |
| Thermocouple L  | DIN43710     | -200 to 900       | 25               | 0.35          |
| Thermocouple U  | DIN43710     | -200 to 600       | 25               | 0.35          |
| Thermocouple W3 | ASTM E988-96 | 0 to 2000         | 25               | 0.70          |
| Thermocouple W5 | ASTM E988-96 | 0 to 2000         | 25               | 0.70          |
| Thermocouple L  | GOST R 8.585 | -200 to 800       | 25               | 0.45          |

Ohm or mV - Linear resistive sensor or mV with 2, 3 or 4 wires

| SENSOR OPTION | INPUT RANGES      | ACCURACY |
|---------------|-------------------|----------|
| mV Input      | -10 mV to 100 mV  | 0.015 mV |
| Ohm Input     | 0 Ohm to 2000 Ohm | 0.45 Ohm |

## TECHNICAL AND PHYSICAL SPECIFICATION

|                                |   |
|--------------------------------|---|
| Accuracy                       | As the above tables   |
| Power Supply / Output Current  | 12 to 45 Vdc (no polarity) / 4-20 mA according to NAMUR-NE43  |
| Communication Protocol         | HART® 7   |
| Hazardous Area Certifications  | Intrinsically Safe (pending)                                  |
| Ambient Temperature Limits     | - 40 to 85°C  |
| Configuration                  | EDDL and FDT/DTM tools, as well as PALM and Android platform. |
| Assembly                       | Head Mounting according to DIN 43729 Form B                   |
| Protection Degree              | IP00 / IP66 (Installed)                                       |
| Electrical Isolation           | Galvanic Isolation, 1.5 kVac                                  |
| Housing Material               | ABS Plastic   |
| Dimension / Approximate Weight | Ø 45 x 23 mm / 90 g   |

## ORDERING CODE

### VTT10-H *Temperature Transmitter – Head Mounting*

|                        |   |                    |
|------------------------|---|--------------------|
| Communication Protocol | H | HART               |
|                        | P | PROFIBUS           |
| Certification Type     | 0 | NO CERTIFICATION   |
|                        | 1 | INTRINSICALLY SAFE |
| Certification Body     | 0 | NO CERTIFICATION   |
|                        | 1 | CEPEL              |
|                        | 2 | FM                 |
|                        | 3 | EXAM               |

Ordering Code Example:

|         |   |   |   |   |
|---------|---|---|---|---|
| VTT10-H | H | - | 0 | 0 |
|---------|---|---|---|---|